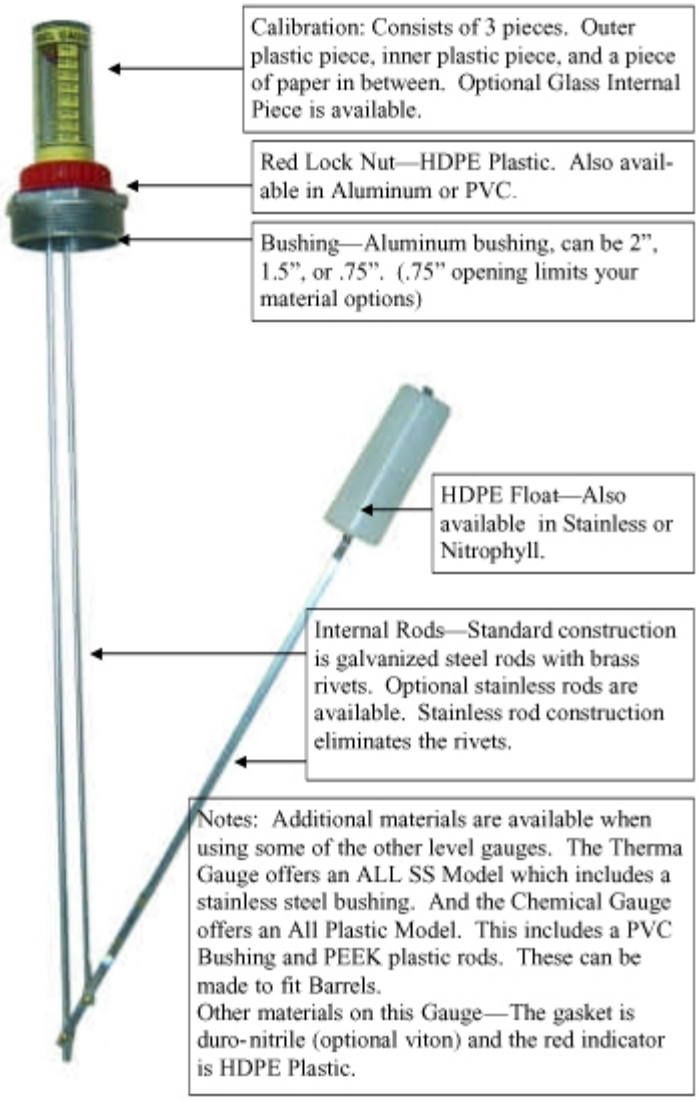
Calibration: Consists of 3 pieces. Outer plastic piece, inner plastic piece, and a piece of paper in between. Optional Glass Internal Piece is available.
Red Lock Nut—HDPE Plastic. Also available in Aluminum or PVC.
Bushing—Aluminum bushing, can be 2", 1.5", or .75". (.75" opening limits your material options)
HDPE Float—Also available in Stainless or Nitrophyll.
Internal Rods—Standard construction is galvanized steel rods with brass rivets. Optional stainless rods are available. Stainless rod construction eliminates the rivets.
Notes: Additional materials are available when using some of the other level gauges. The Therma Gauge offers an ALL SS Model which includes a stainless steel bushing. And the Chemical Gauge offers an All Plastic Model. This includes a PVC Bushing and PEEK plastic rods. These can be made to fit Barrels.
Other materials on this Gauge—The gasket is duro-nitrile (optional viton) and the red indicator is HDPE Plastic.