


The Leak Gauge—Type K

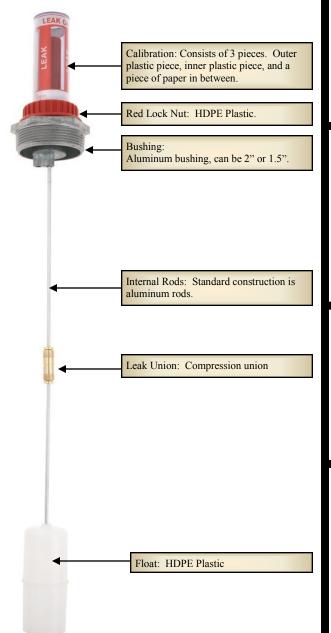

What it is:

Top mounted liquid leak gauge that can measure from 6 inches to 170 inches in depth. Bushing size can be 2" or 1.5". Gauges are custom made in house to fit your tank. This gauge is designed to monitor either the interstitial space of a double wall containment system, or it can mount into an external monitoring pipe.

Additional Options - Not included:

Audible Alarm Accessory: This add on feature can turn your mechanical gauge into an audible Hi or Lo level alarm.

Gauge Guard: A cover that protects the exposed plastic components on top of the gauge.

Instructions for Operation:

This gauge is a simple visual tool. If the red indicator rises into the viewing window, it is indicating that there is a leak occurring in your double wall containment system. Once installed, you simply view the calibration to monitor your interstitial space. The indicator is not calibrated. It simply indicates leak or no leak.

Environmental Protection

The Leak gauge is officially approved for use in double wall containment systems by several state environmental protection agencies.

- Florida DEP
- Michigan DEP

Approval Letters can be found on the Leak Gauge page of our website.

Krueger Sentry Gauge 1873 Siesta Lane Green Bay, WI 54313

www.ksentry.com



Contact us for more info: Ph: 920-434-8860 Fax: 920-434-8897

Email: info@ksentry.com