KRUEGER SENTRY GAUGE
1873 SIESTA LANE GREEN BAY, WI 54313 | 920-434-8860 | www.ksentry.com

At-A-Glance® Direct Reading Gauge – Type D


Top mounted liquid level gauge that can measure from 6 inches to 144 inches in depth and withstand pressures up to 70 PSI. Bushing size can be 2", 1.5", or .75". Gauges are custom made in house to fit your tank. Can also accommodate for double walls and pipe risers.



Calibration: Consists of 3 pieces –
Outer plastic piece, inner plastic piece, and a piece of paper in between.
Upgrades: Inner glass or Solid Glass

Lock Nut: HDPE Plastic
Also available in aluminum or PVC.

Bushing: Aluminum
Can be 2", 1.5" or .75".
PD Option allows for a PVC Bushing

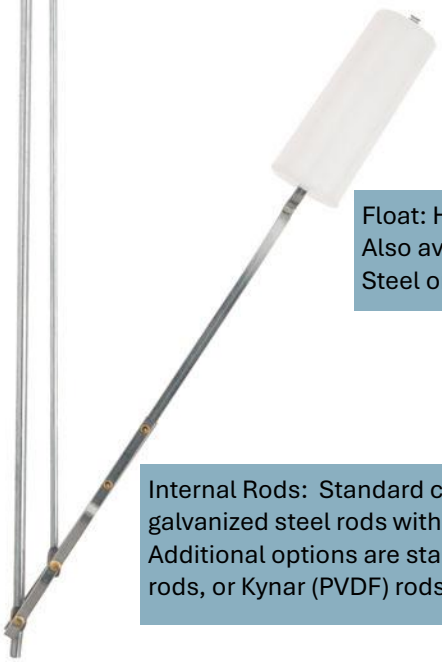

Float: HDPE
Also available in Stainless Steel or Nitrophyll.

Internal Rods: Standard construction is galvanized steel rods with brass rivets. Additional options are stainless steel rods, peek rods, or Kynar (PVDF) rods.

Part Number—
D-(size opening)-(tank depth)+(ext)-(list options)
Example: D-2-48+12

Instructions for Operation:

This gauge is a simple volume reading tool. The top of the red indicator is an indication of your approximate fuel level in your tank. Once installed, you simply view the calibration to monitor your tank level. Indicator is calibrated in eighths of a tank on one side, and quarters of a tank on the other.

Installation Instructions available upon request

Material Options:

- Standard Direct Reading Gauge-Type D-Rods are galvanized steel, floats are HDPE plastic, bushing is aluminum, calibration top is plastic.
- Stainless Level One-Type D-S1- Rods become stainless.
- Stainless Level Two-Type -D-S2- Rods and floats become stainless.
- All Plastic Model—Type PD—This model comes standard with Glass Calibration, PVC Gauge Guard, PVC Bushing, PEEK Plastic Rods, HDPE Plastic Float.

**The Stainless Level Three – S3 option (adds stainless steel bushing) is not available on this model. - If you want this option, see the Therma Gauge Type H.*

Accessories & Add-ons:

- Gauge Guard: A cover that protects the exposed plastic components on top of the gauge.
- Audible Alarm: Can turn your mechanical gauge into an audible Hi or Lo level alarm.
- LED At-A-Glance: Can give your mechanical gauge remote reading capability.
- KSG SmartGauge Transmitter: Can convert a Krueger mechanical gauge into a digital output, 4-20mA, industry standard signal.